


110 Volt Wiring For Display

Connect short jumper from
Neutral(N) to Line 2(L2)

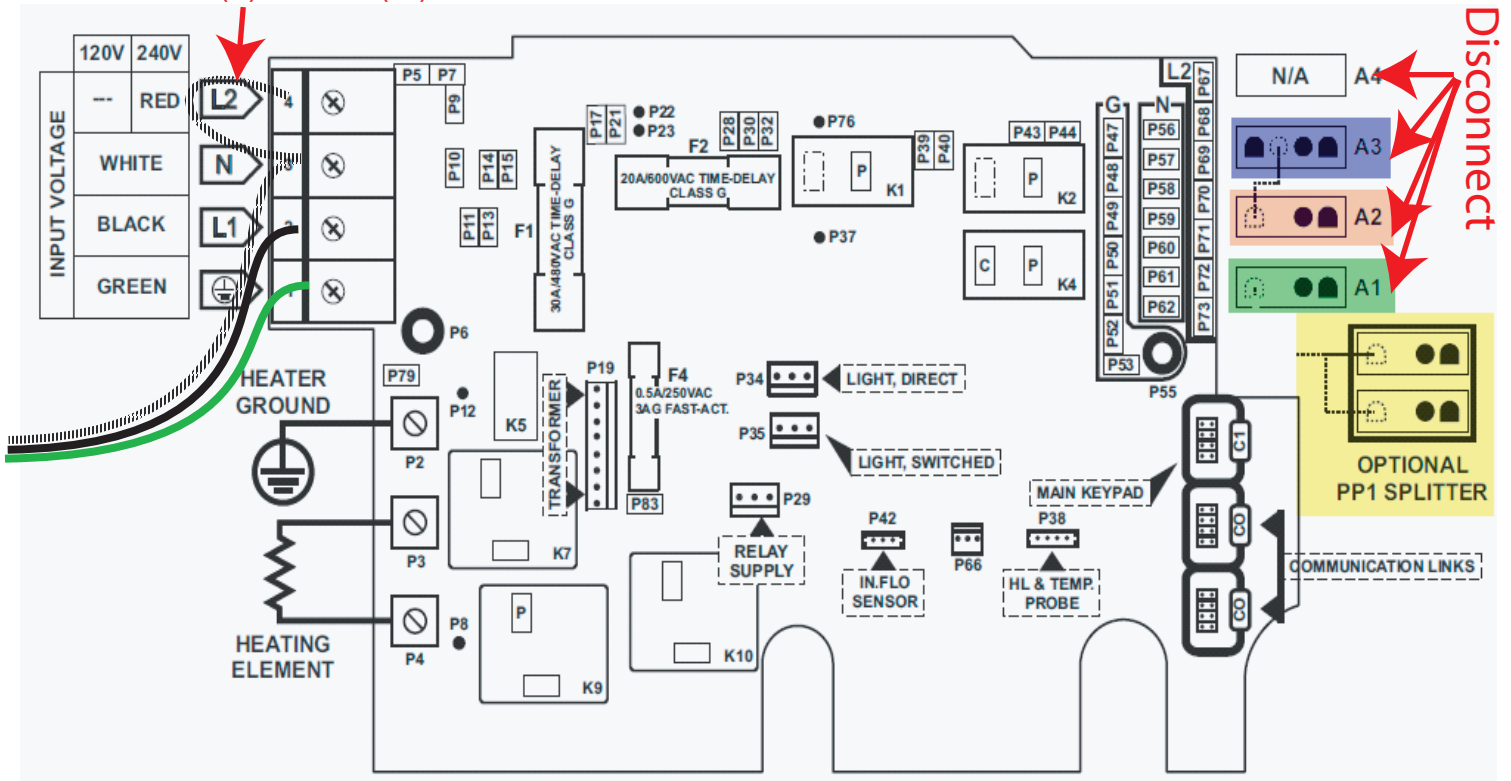

1. Remove cabinet access panel.
2. Open electrical access panel by loosening the two screws.
3. Route wire into the electrical access(wire can be a 110vac three wire extension cord with the female end removed).
4. Connect the Ground(green) wire to the G terminal.
5. Connect the Line 1(black) wire to the L1 terminal.
6. Connect the Neutral(White) wire to the N terminal.
7. Connect a short jumper wire from the N terminal to the L2(red) terminal.
8. Disconnect all pumps, ozonators, and blowers from the spa pack(A1-A4).
9. Close electrical access panel and tighten screws.
10. Keep the stereo power supply(if equipped) connected(A0).
11. Keep the light cable and topside control cable connected to the spa pack.
12. Plug into standard 110vac wall outlet.
13. Reattach the cabinet access panel.